


Standard executions		
Version	Code	Item
Cable mt. 2 with M8 connector	070269	CAV20M8
Cable mt. 5 with M8 connector	070250	CAV50M8
Cable mt. 10 with M8 connector	070298	CAV1KM8

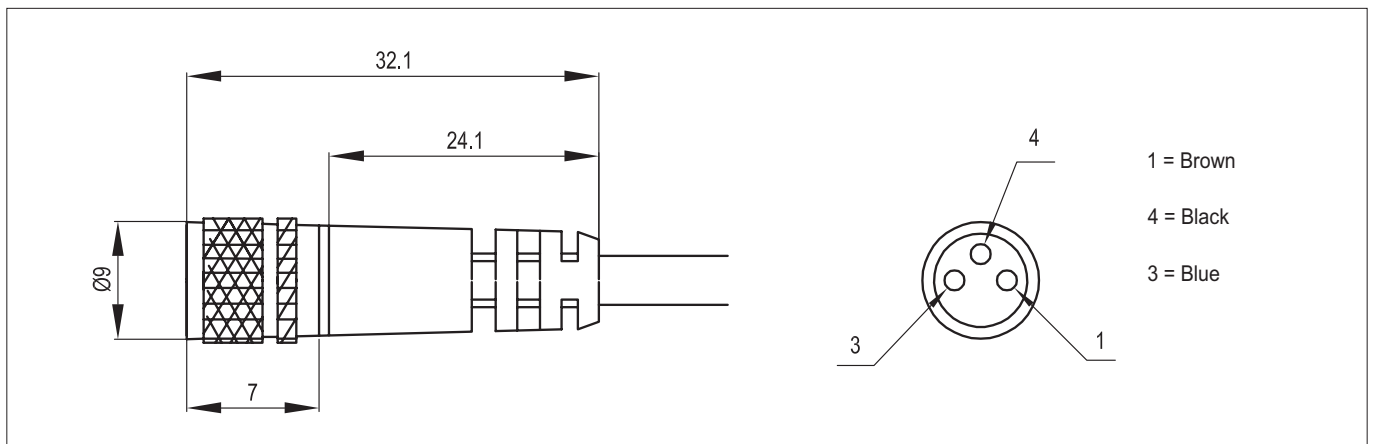

Technical data	
Material of the cable	PVC black
Material of the connector	Body: Polypropylene
	Contacts: Gilded brass
	Nut: Nickel plated brass
Cable data	3 x 24 AWG / 0,22 mm ² flexible, spatter resistant, oil resistant, insulation 300 V
Temperature range	- 20 °C ÷ + 80 °C
Protection	IP 67