

# Ancillary valves

## Miniature ball valves with cast body




Standard executions			
Version	Symbol	Code	Item
1/8" female - female		030641	11MSFF
1/4" female - female		030642	22MSFF
1/8" male - female		030643	11MSMF
1/4" male 1/8" female		030644	21MSMF
1/4" male - female		030645	22MSMF
3/8" male 1/4" female		030646	32MSMF



Series of miniature ball valves with cast body, manually operated and with reduced dimensions.

In line mounting they work to close or open the flow in both directions.

2

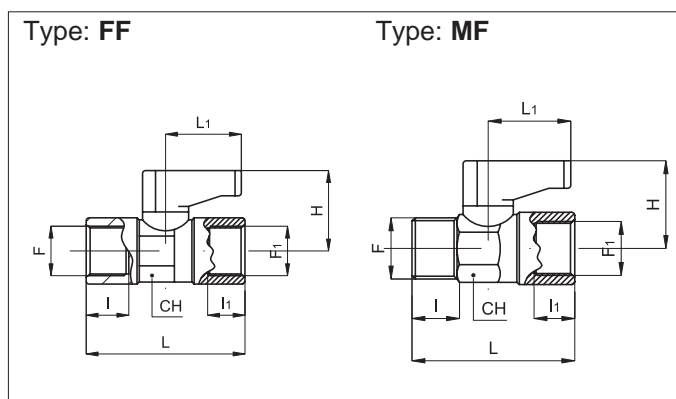

F	F <sub>1</sub>	DN	I	I <sub>1</sub>	L	L <sub>1</sub>	H	CH
1/8"	1/8"	5,5	8	8	36,5	19	21	14
1/4"	1/4"	5,5	11	11	43	19	21	14
1/8"	1/8"	5,5	8	8	35,5	19	21	14
1/4"	1/8"	5,5	11	8	38,5	19	21	14
1/4"	1/4"	5,5	11	11	40,5	19	21	14
3/8"	1,4"	5,5	11,5	11	41	19	21	14

Technical data	
Fluid	Compressed filtered air with or without lubrication.
Pressure range	0 ÷ 10 bar
Temperature range	-10 °C ÷ + 90 °C
Orifice	See the dimension DN in the table
Mounting	In-line
Materials	Body: Nickel plated brass Lever: Nylon 66, reinforced glass Seals: PTFE - NBR Ball: Nickel plated brass