

# Accessories with integrated function


## Stop fittings



Version	Symbol	Type
Push-in stud		V59



Series of push-in fittings with check valve, these will not allow air-flow through when tube isn't in.

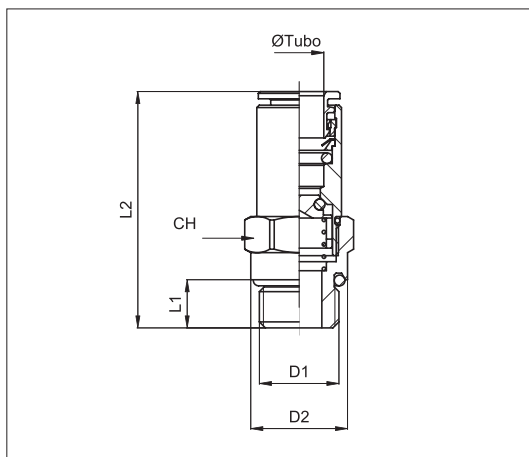

Code	Item	Tube Ø	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	CH
024470	V590618	6	1/8"	13,5	5	27	12
024471	V590614	6	1/4"	16	6,5	27	12
024472	V590818	8	1/8"	13,5	5	27,5	13
024473	V590814	8	1/4"	16	6,5	27,5	13

Technical data	
Fluid	Compressed air
Pressure range	Max. 10 bar
Temperature range	-20 °C ÷ + 70°C
Parallel threads	UNI - ISO 228 / 1 (BSP)
Connection tubes	Calibrated nylon, polyurethane and rilsan.
Tubes tolerances	± 0,05 mm
Materials	Body and release collar: Nickel plated brass Valve: Brass Collet: Stainless steel Seals: Nitrile rubber (NBR)